

ADDENDUM NO. 02

SUWANNEE HIGH SCHOOL INTERIOR COURTYARD REMODEL

A/E# 2012.52

DATE: May 03, 2013
TO: All Plan Holders
FROM: Architects RZK, Inc.

2.0 BID DATE AND TIME

- A. The bid date remains Wednesday, May 08, 2013, at 2:00pm local time and the bids are to be delivered on or before 2:00 pm to the School District Financial Office at 702 2nd Street N.W., Live Oak, FL 32064.**

2.1 SPECIFICATIONS SECTION 07 52 16 – SBS MOD. BIT. ROOFING SYSTEM

Include or insert the following:

- A. All new roofing materials shall be sealed at the end of each day.
- B. The contractor shall provide the architect of record a “final statement of compliance” that all materials are per the specifications and section 423.12 Roofing of the Florida Building Code 2010 ed.
- C. The roof system installed under this project shall be inspected by the system manufacturer’s certified representative one year after the installation is completed and accepted by the school board and shall provide the architect / owner with a written report of the inspection.
- D. All roofing materials shall be labeled class ‘A’ per ASTM E108 and shall be certified by a nationally recognized independent testing laboratory. The system shall be installed within the limitations of the test procedure for surfacing, deck cross slope and combustibility.

2.2 SPECIFICATIONS SECTION 09 12 50 – INT. NON-BRG. METAL FRAMING

Include, replace or insert the following:

- A. All framing shall be galvanized to the G40 standard.

2.2 SPECIFICATIONS SECTION 09 29 00 – GYPSUM DRYWALL

Include, replace or insert the following:

- A. All new drywall shall have a textured finish which shall be a course orange peel or light splatter as selected by the architect.
- B. Abuse resistant, with high impact characteristics, drywall shall be used in all locations subject to normal access by students. That at the upper areas surrounding the windows is not normally accessible by students and may be standard drywall of the thickness specified.

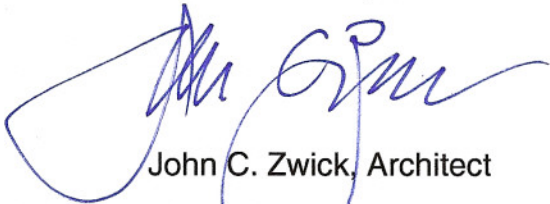
2.3 SPECIFICATIONS SECTION 09 51 13 – ACOUSTICAL CEILING PANELS

Include or insert the following clarification:

- A. The ceiling tiles shall be Armstrong 'fine fissured' 2' X 2' X 5/8", #1728 having an NRC of .55 and a CAC of 33 minimum. A product by USG, equal in all respects, will be acceptable.
- B. All locations where existing ceilings are removed (corridors, classrooms and etc.) for new construction shall be repaired or replaced to blend with the existing

Please enter the appropriate addendum number on the proposal form to be submitted.

Architects RZK, INC.

A handwritten signature in blue ink, appearing to read 'John C. Zwick', is written over the printed name.

John C. Zwick, Architect

attachments:

- None